




HOT TAPPING MACHINE E424

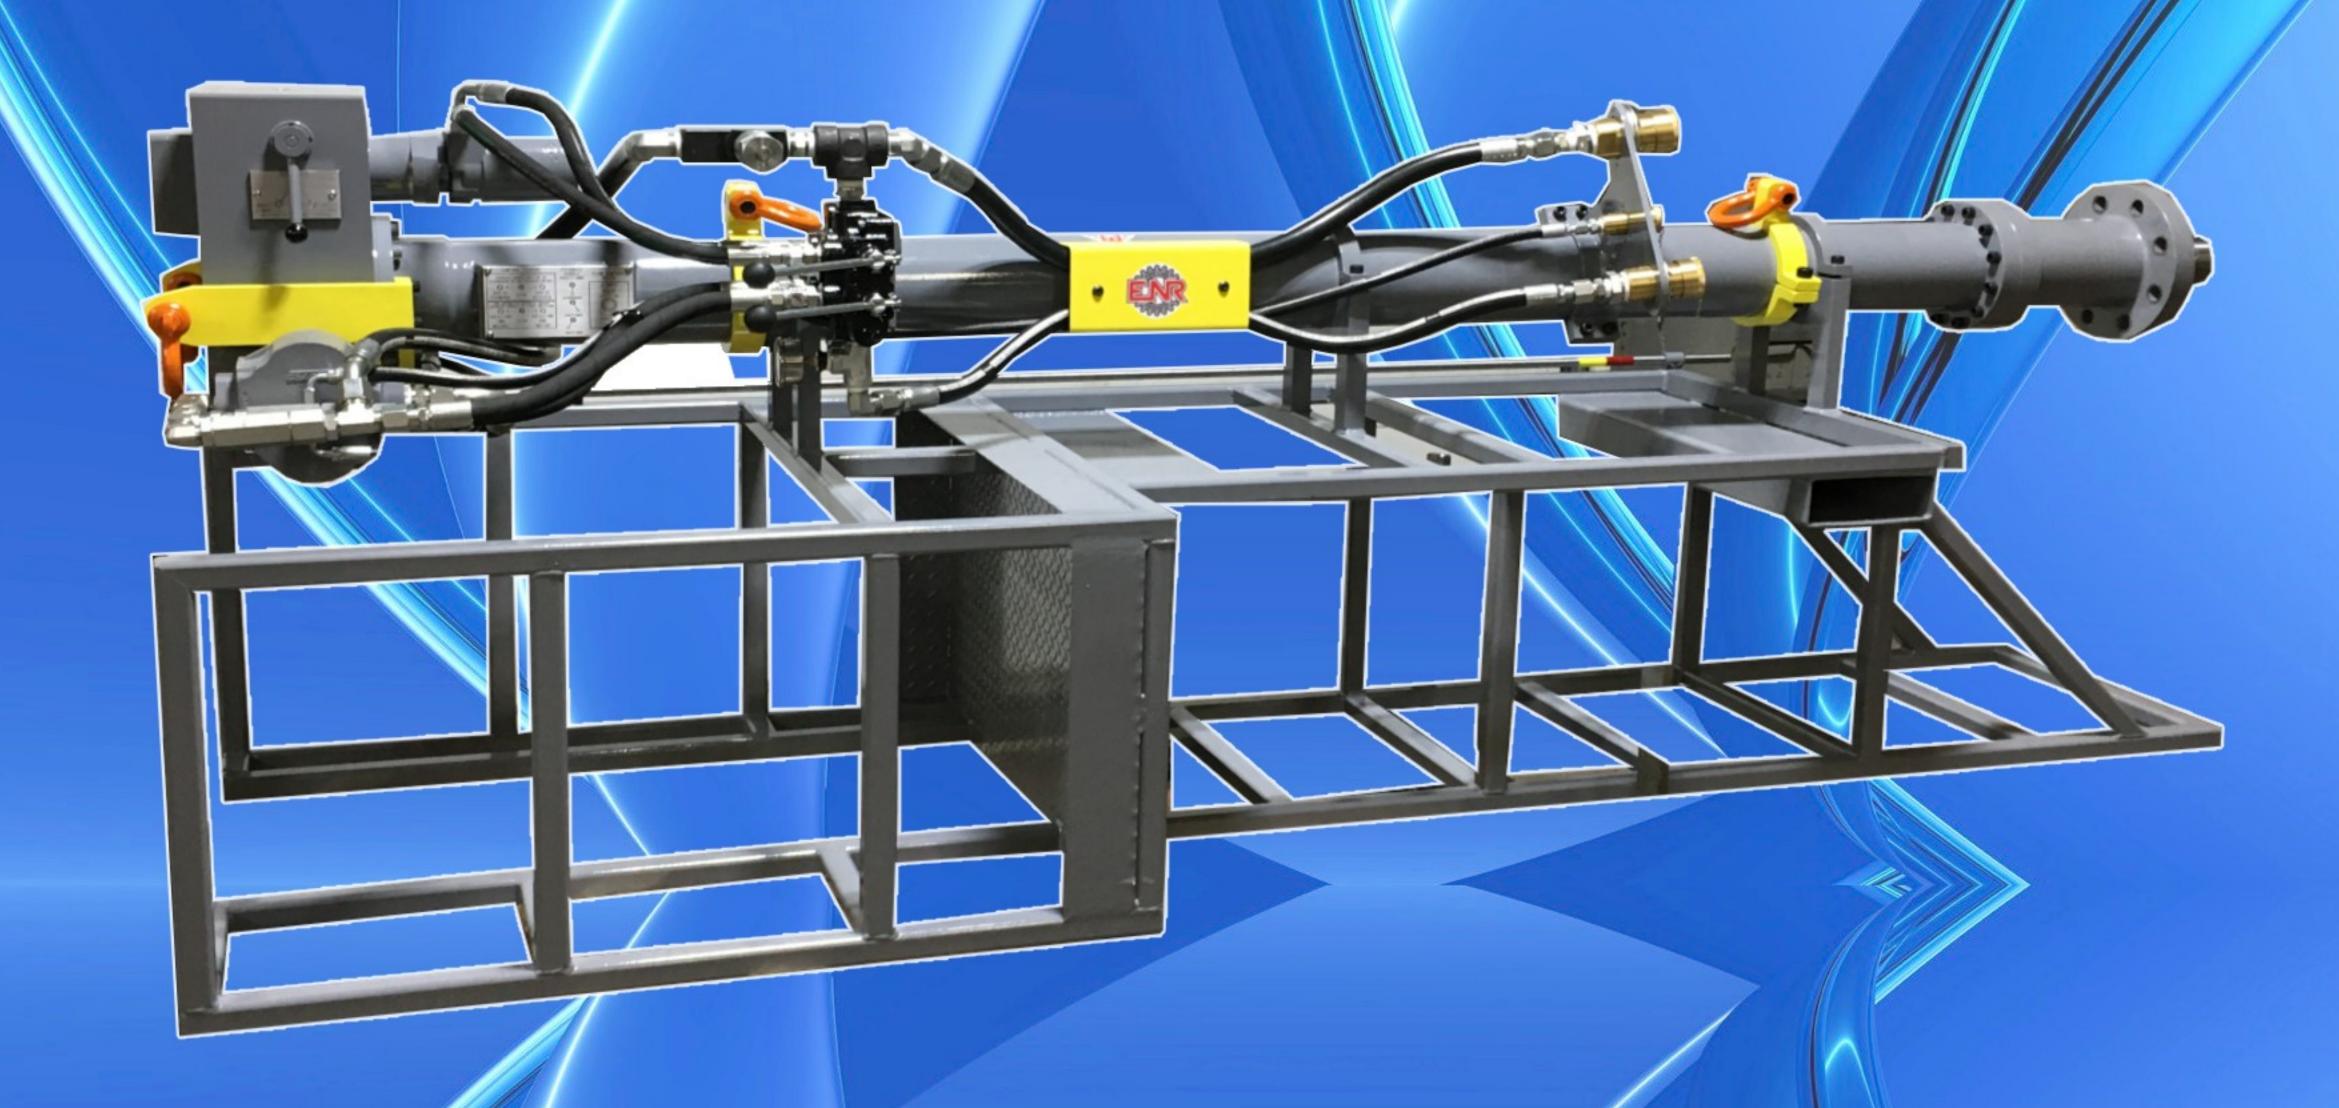

SPECIFICATIONS

Boring Bar Length: -----Max. Operating Temperature:

Severe Packing: ------Standard Packing: -----

Auto Feed Rate: -----/0.0027"/rev and 0.0042"/rev ower Supply: -----Hydraulic Unit - 30/35GPM

E424 machine is completely new and revolutionary design for hot tap equipment.

This machine has to feet rates: 0.0027"/rev & 0.0042"/rev.

Machine has been design to cover a work range from 4" to 24" with a 3" Boring Bar Travel of 86" length, Including a 4" 600# RTJ front flange.

The machine is hydraulically powered, via Diesel Hydraulic Power Unit. (30-35GPM)



AMERICATRADE

WWW.AMERICATRADE.CO - info@americatrade - Ph: +1 617 800 7502



POWER UNIT E424

OUR POWER UNIT 424 HAS BEEN DESIGNED TO OPERATE ALL OUR HOT TAPPING MACHINES SERIES E300 AND ALSO OUR LINE STOP ACTUATORS REF. 312 AND REF 1420





CONTROL PANEL FEATURES

- * DIGITAL HOUR METER
- * RPM TACHOMETER GAUGE
- * STARTER KEY
- * BATTERY LIGHT
- * OIL LIGHT
- * TEMPERATURE LIGHT

TECHNICAL SPECIFICATIONS

FEATURES	DESCRIPTION
ENGINE	Diesel 30 HP Kubota, Deutz, Toyota Lincence 4 Cylinders
PUMP	Gear Pump - Rated @ 30GPM
TANK	50 - 60 Gallons
PRESSURE RELIEF VALVE	Factory Presset 1200 - 2200 PSI
MOUNTING	Unit Skid Mounted
HOSES	50 ft - Exit & Return Hoses Included
COUPLING	Quick Connections
HOUSES	1" X 50ft - Pressure Line 1 1/4" x 50ft - Return Line 3/8" Drain Line
RADIATOR	Motor Radiator Oil Cooling System
MADE	USA
WEIGHT	2300lbs