





AMERICA TRADE

WWW.AMERICATRADE.CO - info@americatrade.co - Ph: +1 617 800 7502

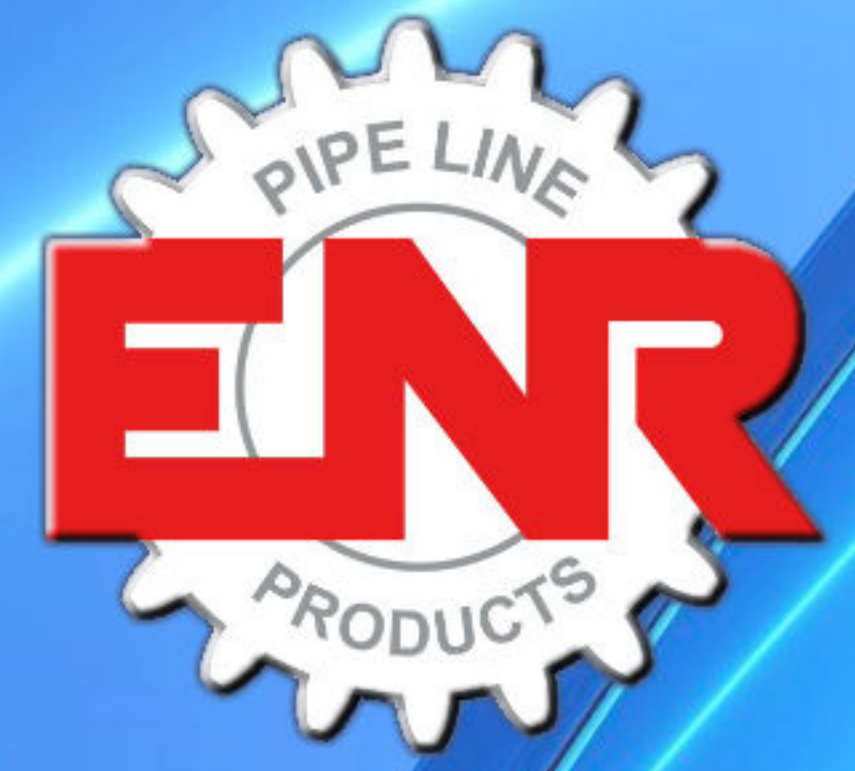

HOT TAPPING MACHINE E1448

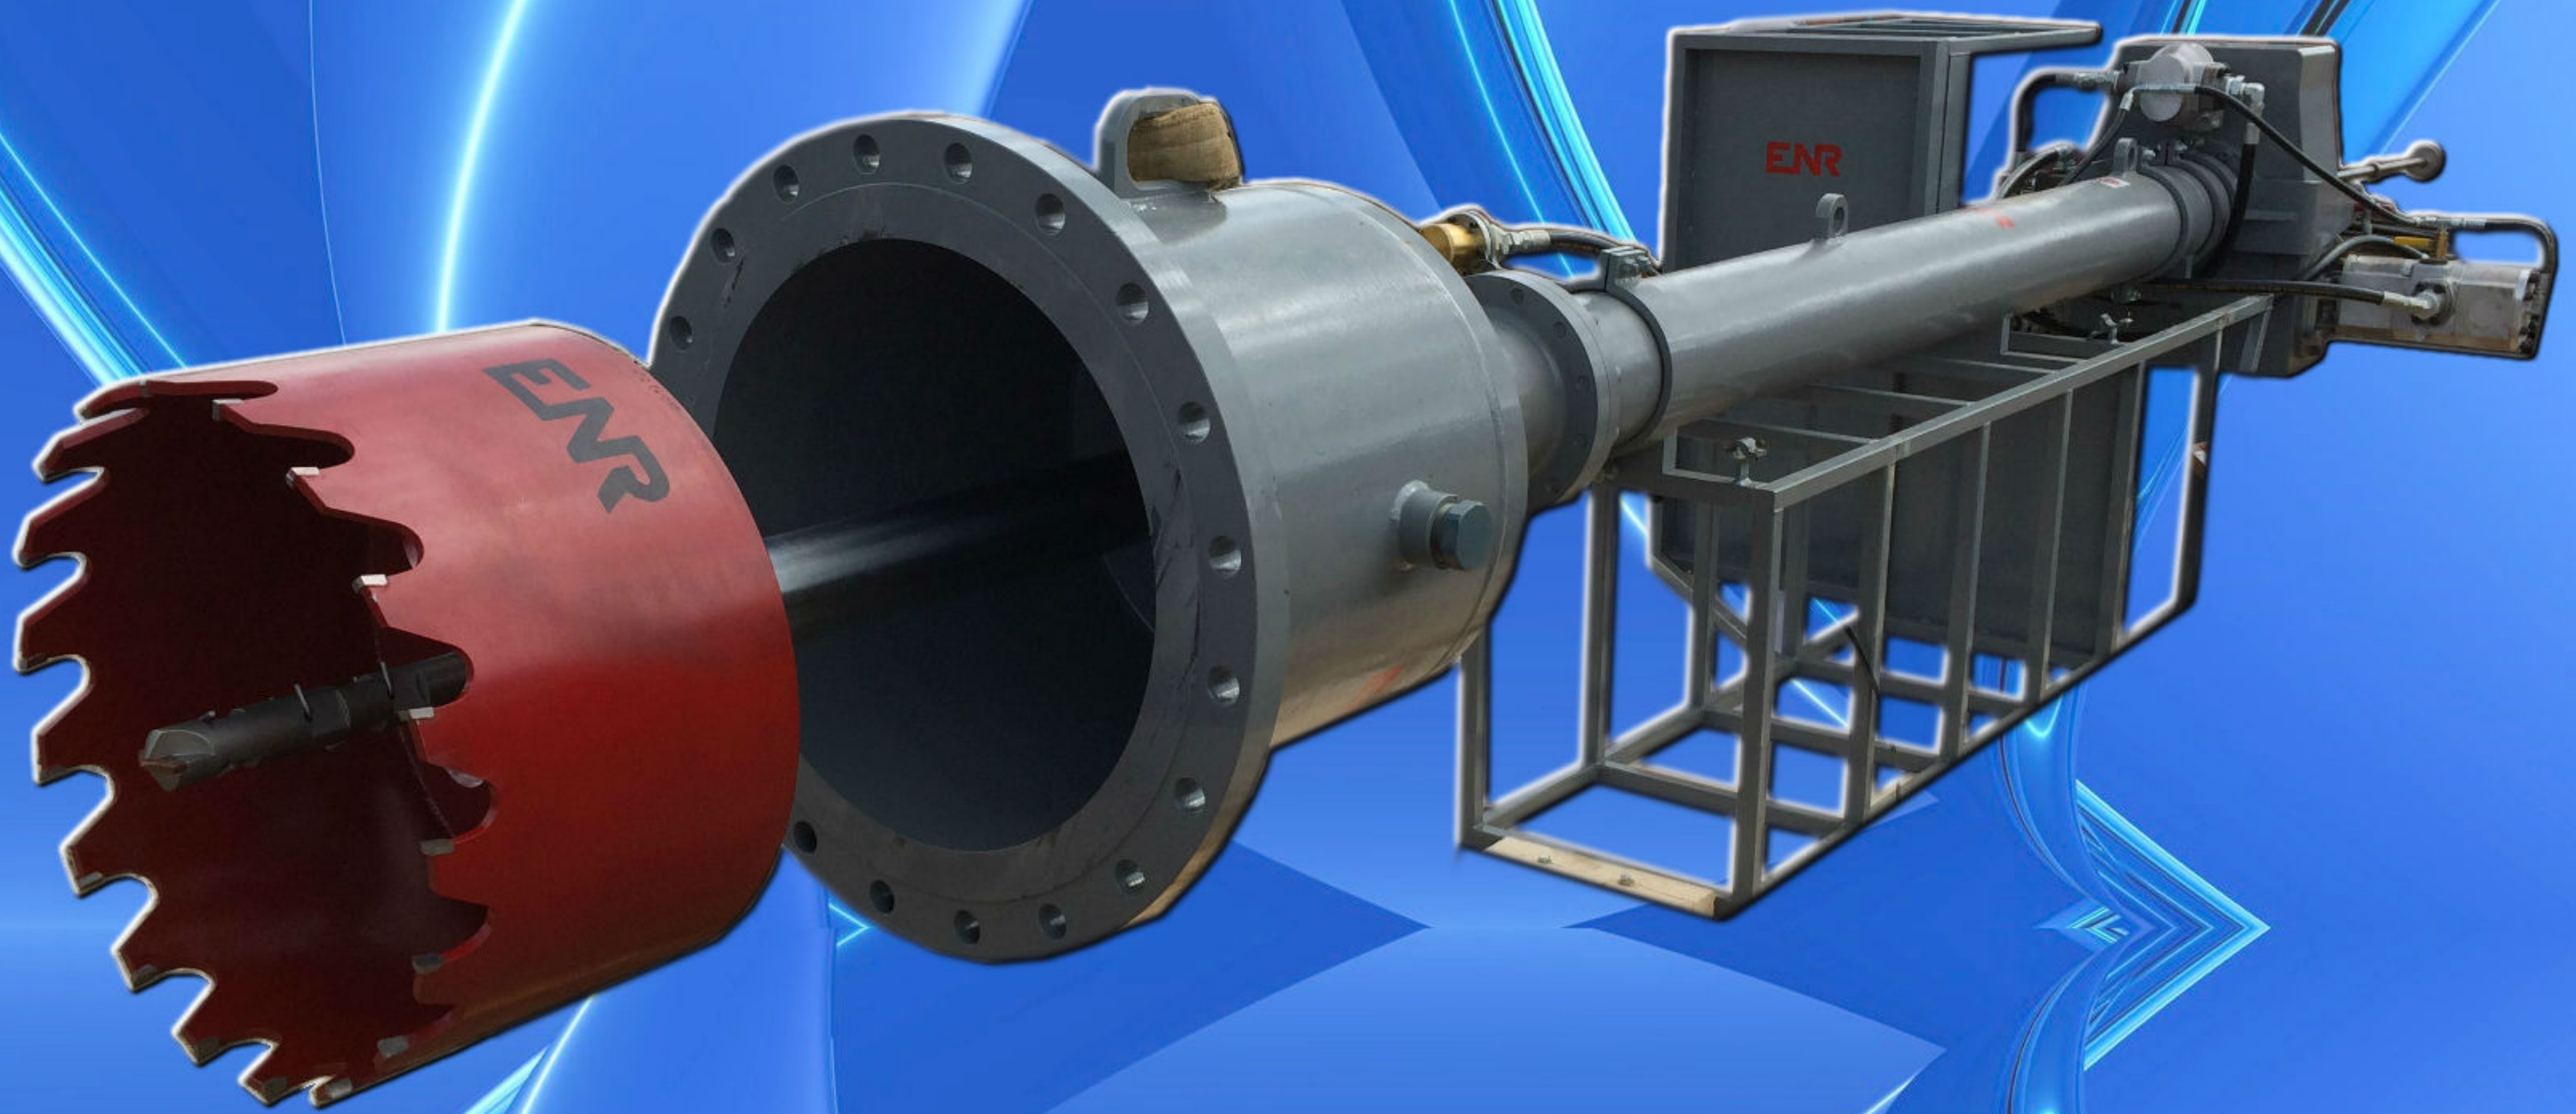

SPECIFICATIONS

- Boring Bar: ----- 80", 110" & 120"
- Tapping Range: ----- 14" - 48"
- Max. Operating Pressure: ----- 1480PSI @ 100°F
- Max. Operating Temperature:
 - o Standard Packing: ----- 300°F @ 700PSI
 - o Severe Packing: ----- 700°F @ 700PSI
- Auto Feed Rate: ----- 0.004"/Rev.

The Model E1448 Tapping Machine providing a tapping Size Range of 14" to 48", with a Boring Bar Travel of 80, 110 and 120 inches


The machine is hydraulically powered, via Diesel Hydraulic Power Unit.

ENR E1448 Tapping Machines is capable of operating up to 1480 psig, so allowing safe operations on lines up to full ANSI 600 Operating Pressures

The Machine is operated via Tandem Hydraulic Motor with two speed operation on constant flow input, providing Speed Control Features for Cutter Rotation, while a separate Hydraulic Motor provides Power Extension and Retraction of the Boring Bar.

MODELS

REFERENCE	DESCRIPTION	UNIT WEIGHT	LONG
E1448-80	Model E1448 Boring Bar 80"	960 Kg	120"
E1448-110	Model E1448 Boring Bar 110"	1141	150"
E1448-120	Model E1448 Boring Bar 120"	1277	160"

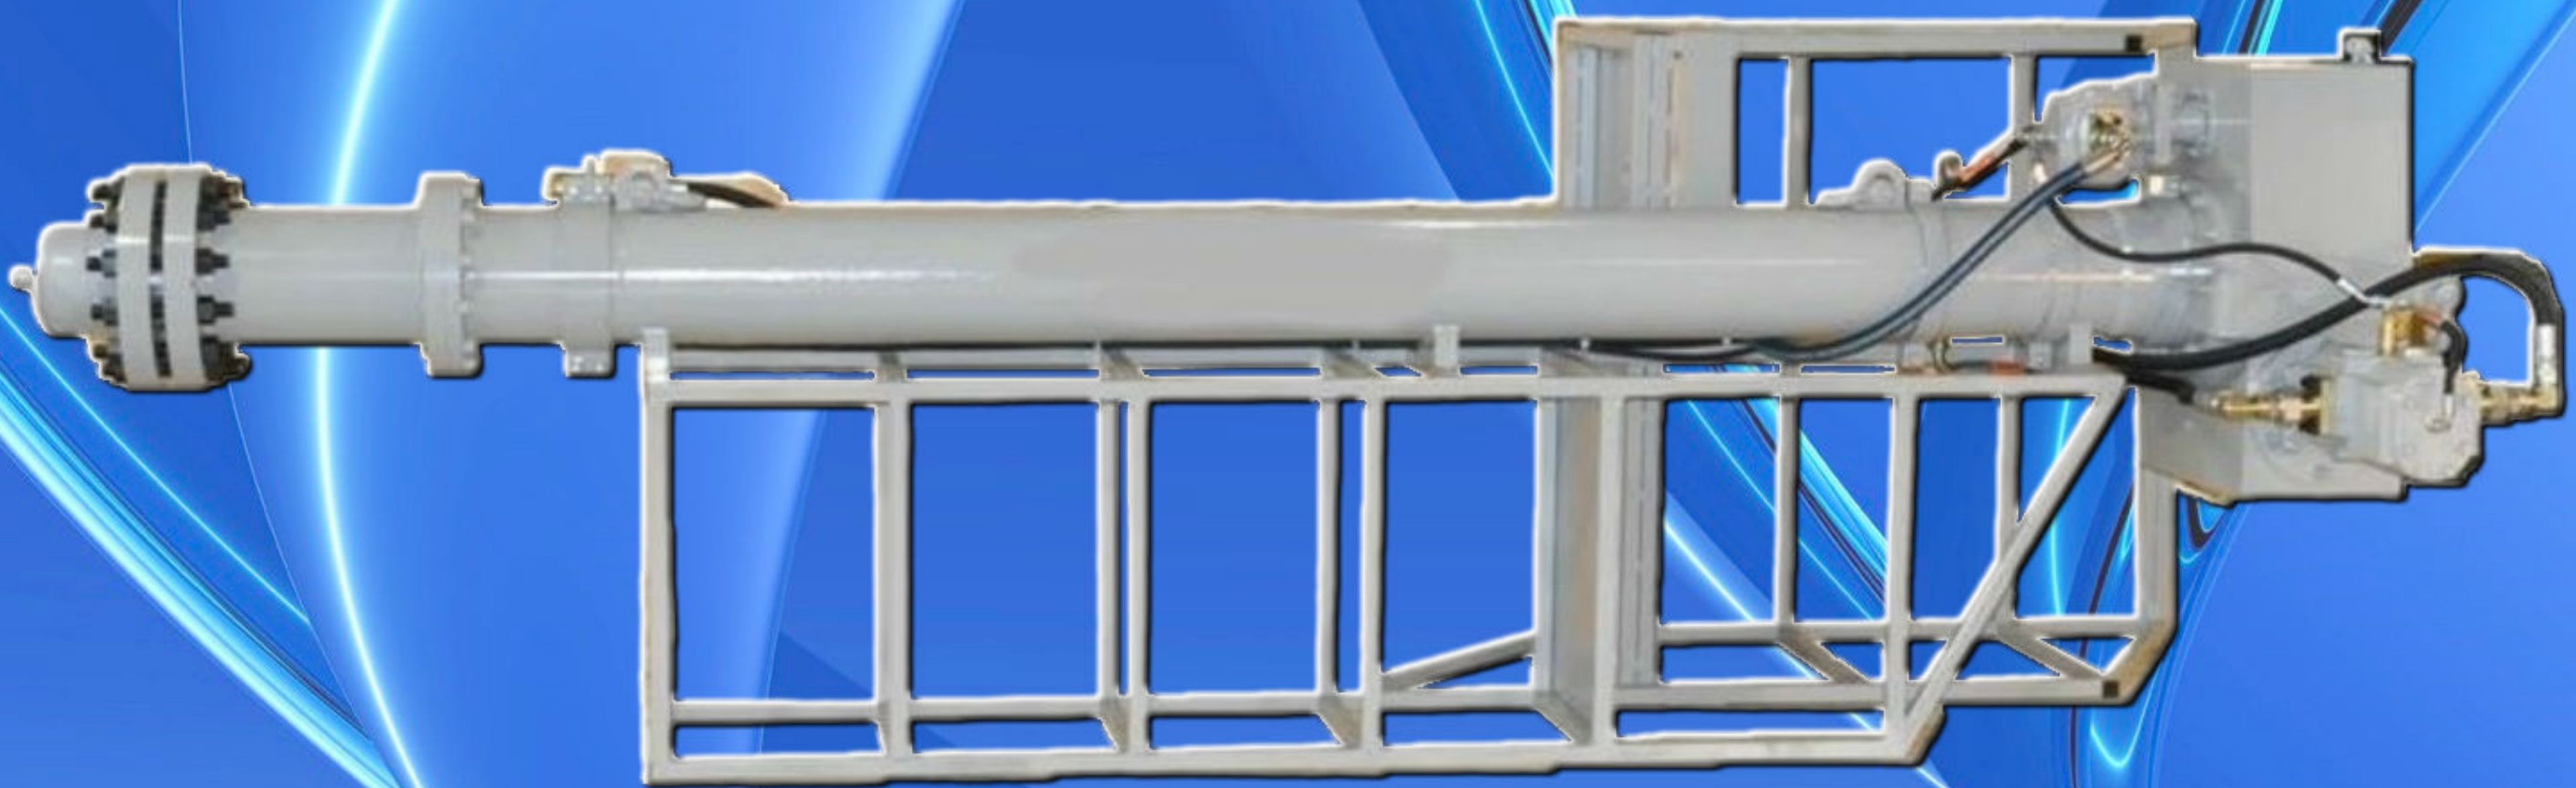

ACCESSORIES INCLUDED

REFERENCE	DESCRIPTION	UNIT WEIGHT
E1448-CH	CRANK HANDLE	2 Kg.
E1448-PWI	PACKING RETAINER SCREW WRENCH INNER	2 Kg.
E1448-PWO	PACKING RETAINER SCREW WRENCH OUTER	2 Kg.
E1448-PTI	PACKING TOOL INNER	1 Kg.
E1448-PTO	PACKING TOOL OUTER	1 Kg.
E1448-6-R	RING RTJ 6" #600	1 Kg.
E1448-SC	LONG SOCKET HEAD CAP SCREWS (12)	10 Kg.
E1448-BV	1/4" BLEEDER VALVE	1 Kg.
E1448-MR	MEASURING ROD	4 Kg.



HOT TAP ACCESSORIES

ACCESSORY	RANGE
CUTTER HOLDER I	14" - 30"
CUTTER HOLDER II	32" - 48"
TAPPING ADAPTER	14" - 48" (ANSI #150, #300, #600, #900)
HOT TAP - CUTTER	14" - 48"
HOT TAP - PILOT DRILL	14" - 48" (INTERCHANGEABLE BITS)

